


S400 COLOR PANEL-C4

Fixture Menu

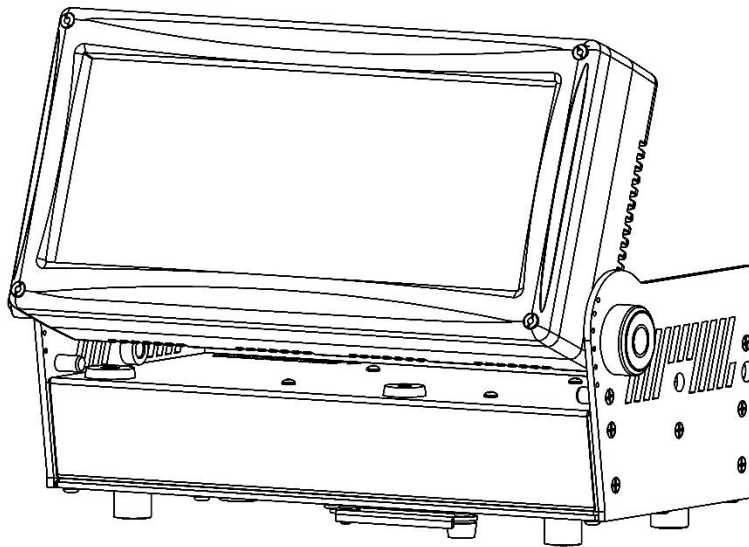

 **STAGEHERO**

S400-C4


Weight: 7.0 KG

Power: 440 W

Color : RGBW

Ver. 1.0.1

S400 Color Panel-C4 Fixture menu navigation



Simplified Menu (if enabled)

Main Menu	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
Address	DMX Address	1-509	001-* - (xxx)				
DMX Mode	Standard*						
	Advanced						
	Compressed						
	RGBW						
Wireless DMX	Enable	Yes					
		No*					
Advanced Menu*	EnterPassword (9999)						

To access the full function advanced menu, navigate to “Advanced Menu” and enter “9999” to access.

Advanced Menu (all functions)

Main Menu	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7 (1/4)
Address	DMX Address	1-509	001-* - (xxx)				
Personality	DMX Mode	Standard*					
		Advanced					
		Compressed					
		RGBW					
	Wireless DMX	Enable	Yes				
			No*				
		Link	Yes: Link				
		No: Unlink					
	Remote DMX Addr.	On*					
		Off					
	Dimmer Curve	Standard					
		Linear					
		Theatrical*					
		Square Law					
	Dimmer Speed	Inverse Square					
		Fast					
		Smooth*					
	Color Shift Ctrl	Ultra Smooth					
		Disabled*					
		Enable					
PWM Rate Setting	600 Hz						
	1200 Hz*						
	2000 Hz						
	2400 Hz						

Main Menu	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7 (2/4)		
Personality	PWM Rate Setting	12000 Hz							
		24000 Hz							
		30000 Hz							
	Cooling Mode	Auto*							
		Silent							
		Standard							
		High power							
	Mic Enable	Disable*							
		Enable							
	Mic Sensitivity	Normal*							
		High							
		Low							
	Reset via DMX	Off							
		On*							
	Display Settings	On* / Off	Cancel*						
			Confirm						
		Intensity	1-10						
		Shut-off time	Off*						
			2 minutes						
			3 minutes						
			4 minutes						
			5 minutes						
			10 minutes						
			15 minutes						
			20 minutes						
			30 minutes						
			40 minutes						
			50 minutes						
		60 minutes							
		No signal flash	On*						
	Off								
	Flip Display	Off *							
		On							
	Temperature unit	Celsius *							
		Fahrenheit							
	No DMX	Shutter Closed*							
		Hold							
		Play Program1							
	Fixture ID	Disabled*							
		Set	1-255						
	Lock	Off*							
		On							
		Set Password	****						
Boot Mode	Select Mode	DMX*							
		Static							

Main Menu	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7 (3/4)
Personality	Boot Mode	Select Mode	Program				
		DMX Hi Priority	On*				
	Language	English*					
		Japanese					
Stand-Alone	Test Sequence	Run					
		Cancel*					
	Master / Slave	Alone*	confirm				
		Master	confirm				
		Slave	Slave 1*				
			Slave 2				
	Slave 3						
	Static Mode	Static Mode 1	Dimmer	0-255			
			Shutter Duration	0-255			
			Shutter Flash Rate	0-255			
			Shutter Effects	0-255			
			Color Wheel	0-255			
			Red	0-255			
			Green	0-255			
			Blue	0-255			
			White	0-255			
			CTO	0-255			
			Pattern	0-255			
			Pattern Speed	0-255			
			Control	0-255			
			Remote DMX Addr.	0-255			
			Reset	Yes No*			
	Program Edit	Program 1	Max Steps	01-30			
			Select Step	01-30			
			Capture DMX	Yes/Cancel			
			Hold Time(s)	000-999 (s)			
			Fade Time(s)	000-999 (s)			
Program 2		(See above)					
Program 3		(See above)					
Reset Program		Reset Program1	No* Yes				
		Reset Program2	No* Yes				
		Reset Program3	No* Yes				
		Reset All	No*				
			Yes				

Main Menu	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7 (4/4)	
Stand-Alone	Program Play	Program 1	No* / Yes					
		Program 2	No* / Yes					
		Program 3	No* / Yes					
		Program All	No* / Yes					
Service	Reset	Fixture Reset	Yes					
			No*					
	Calibrations	Color CALIB.	Disable					
			Enable*					
	Factory Default	Load	No*					
			Yes					
Information	Fixture time	Resettable	xxx Hours					
		Total	xxx Hours					
		Clear Resettable	Clear Cancel	Cancel* Clear				
	Fixture Temp.	Head LED	Actual	xxx C / F				
			Max	xxx C / F				
			Reset Max	Cancel* Confirm				
		Base Driver	(See above)	(See above)				
	Firmware version	xxxxxxx						
	Serial Number	xxxxxxxxx						
	Product ID	S400 Panel-C4						
DMX Live	Refresh rate	xxx Hz						
	Dimmer	0-255						
	Dimmer Fine	0-255						
	Shutter Duration	0-255						
	Shutter Flash Rate	0-255						
	Shutter Effects	0-255						
	Color Wheel	0-255						
	Red	0-255						
	Red Fine	0-255						
	Green	0-255						
	Green Fine	0-255						
	Blue	0-255						
	Blue Fine	0-255						
	White	0-255						
	White Fine	0-255						
	CTO	0-255						
	Pattern	0-255						
	Pattern Speed	0-255						
	Control	0-255						
	Remote DMX Addr.	0-255						

